

YRA-AB.30/3-180(50) - 310

TYPE	WITH SECTION	LENGTH	LENGTH	ALLOY
Aluminium ball	YxZ	L	S	310

Our recommendations:



- Designed for gun welding
- This anchor will be open on site by the installer



www.anchorsforrefractory.com
 contact@anchorsforrefractory.com

Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

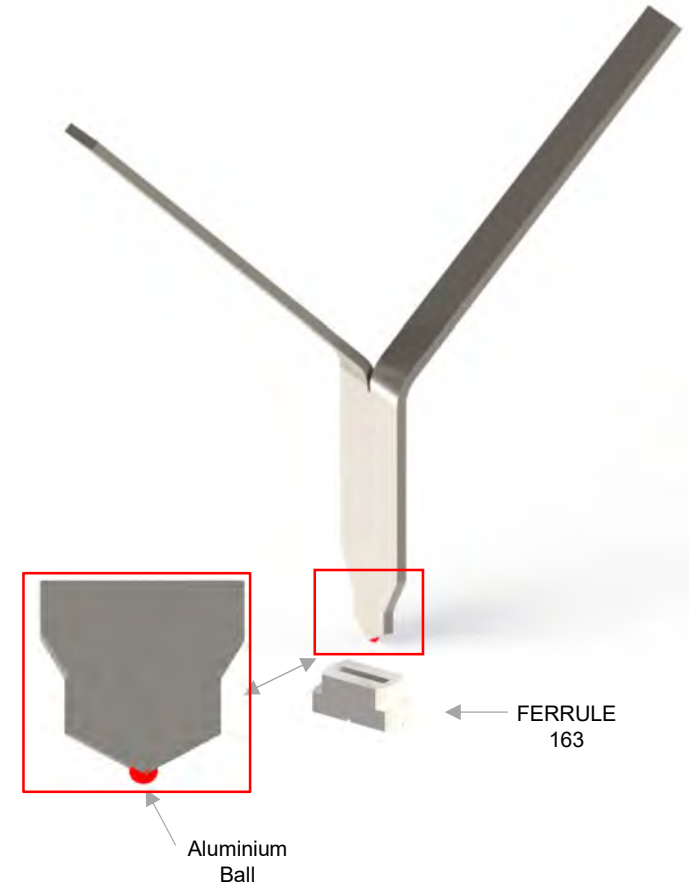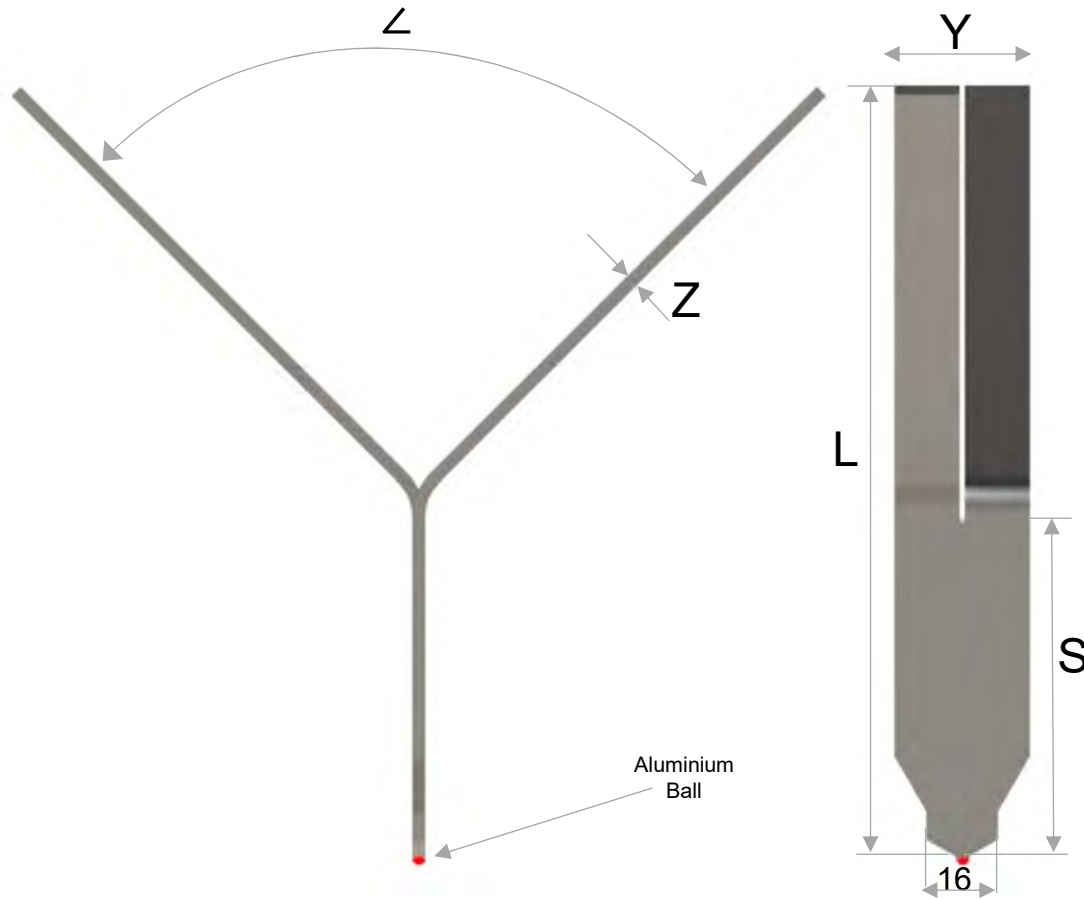

YRA-AB.30/3(90°)-180(50) - 310

TYPE	WITH SECTION	OPENING	LENGTH	LENGTH	ALLOY
Aluminium ball	YxZ	∠	L	S	

Our recommendations:

- Designed for gun welding





www.anchorsforrefractory.com
contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

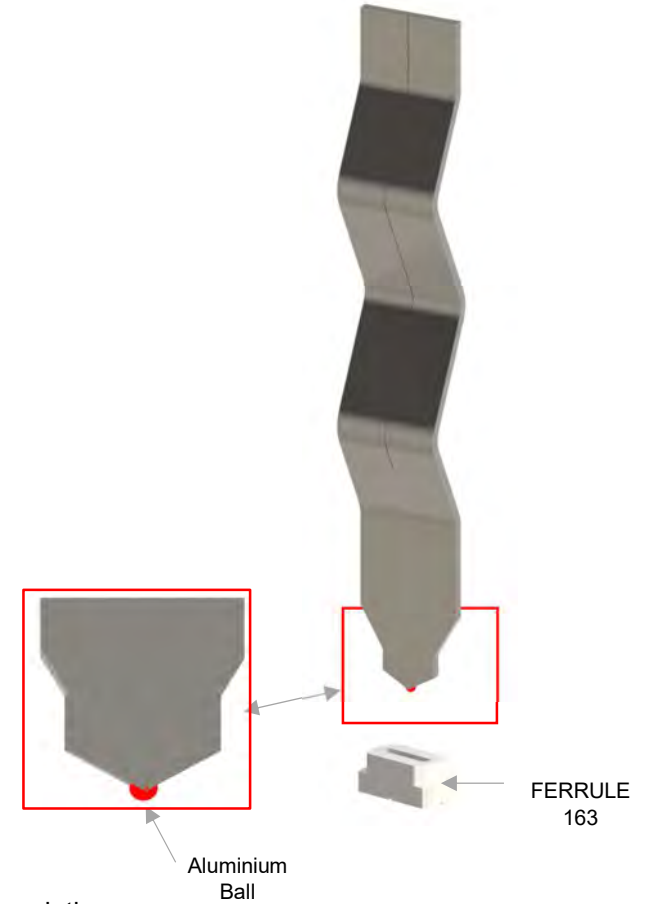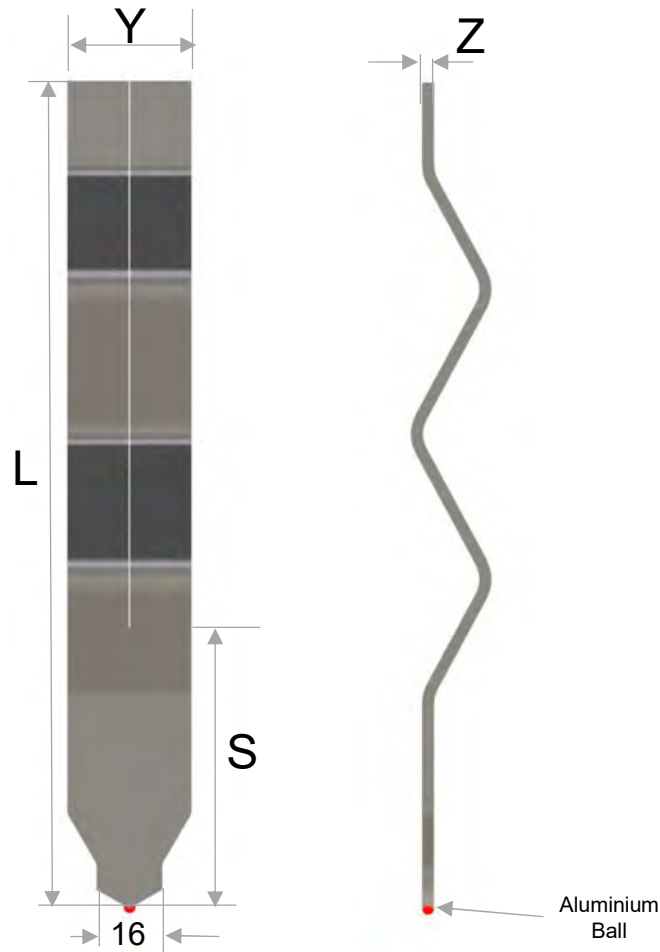

YRB-AB.30/3-180(50) - 310

TYPE	WITH SECTION	LENGTH	LENGTH	ALLOY
Aluminium ball	YxZ	L	S	310

Our recommendations:

- Designed for gun welding
- This anchor will be open on site by the installer





www.anchorsforrefractory.com
 contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

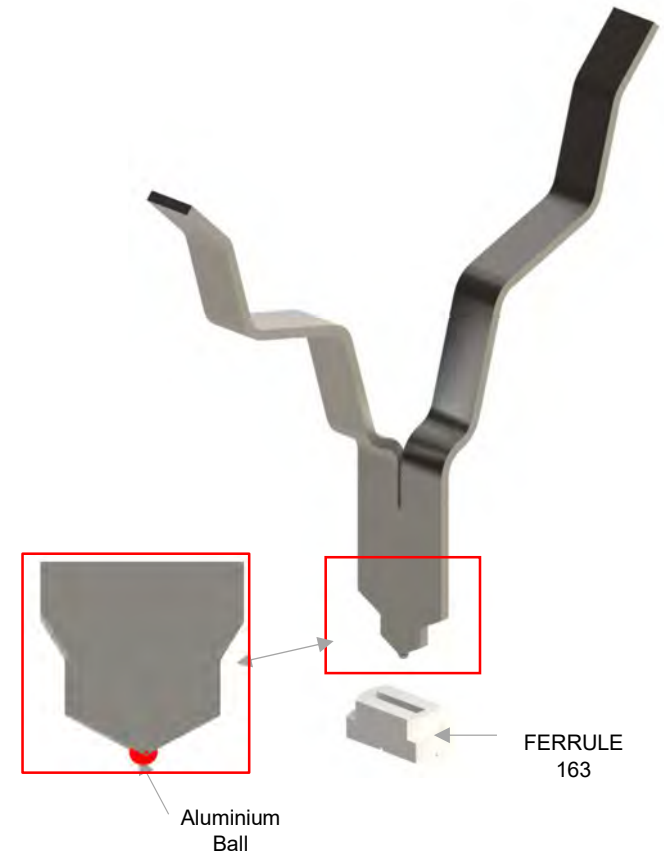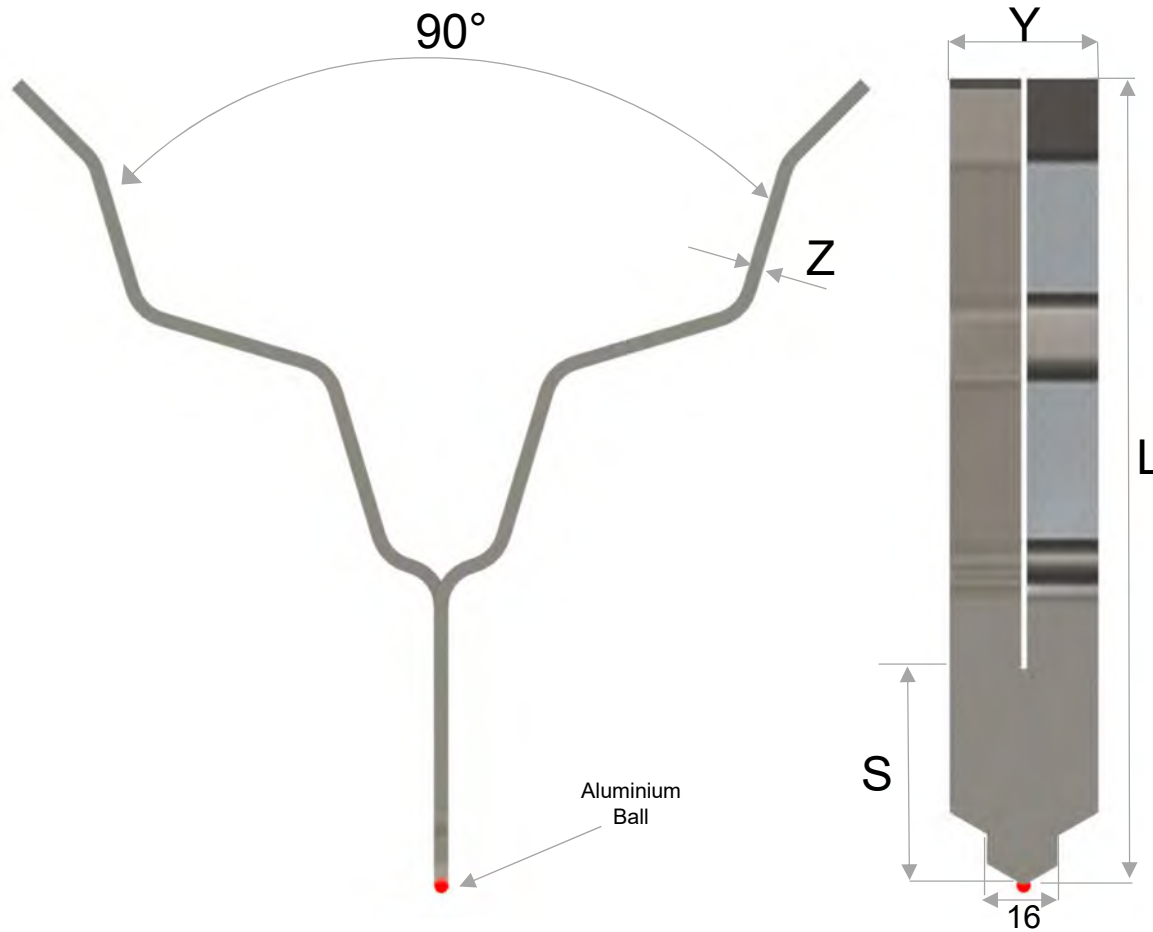

YRB-AB.30/3(90°)-180(120) - 310						
TYPE	WITH	SECTION	OPENING	LENGTH	LENGTH	ALLOY
	Aluminium ball	YxZ	Ex :90°	L	S	

Our recommendations:

- Designed for gun welding




www.anchorsforrefractory.com
 contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

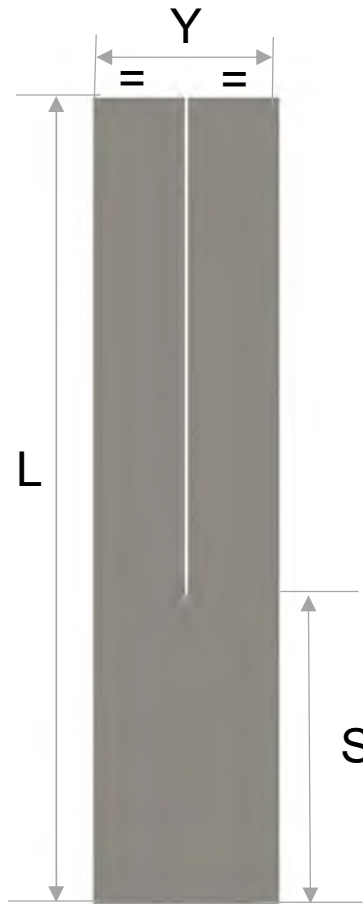

YHA- 30/3-130(050) - 310

TYPE	SECTION	LENGTH	LENGTH	ALLOY
	YxZ	L	S	

Our recommendations:


- This anchor is designed for electrode welding
- This anchor will be open on site by the installer

www.anchorsforrefractory.com
contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

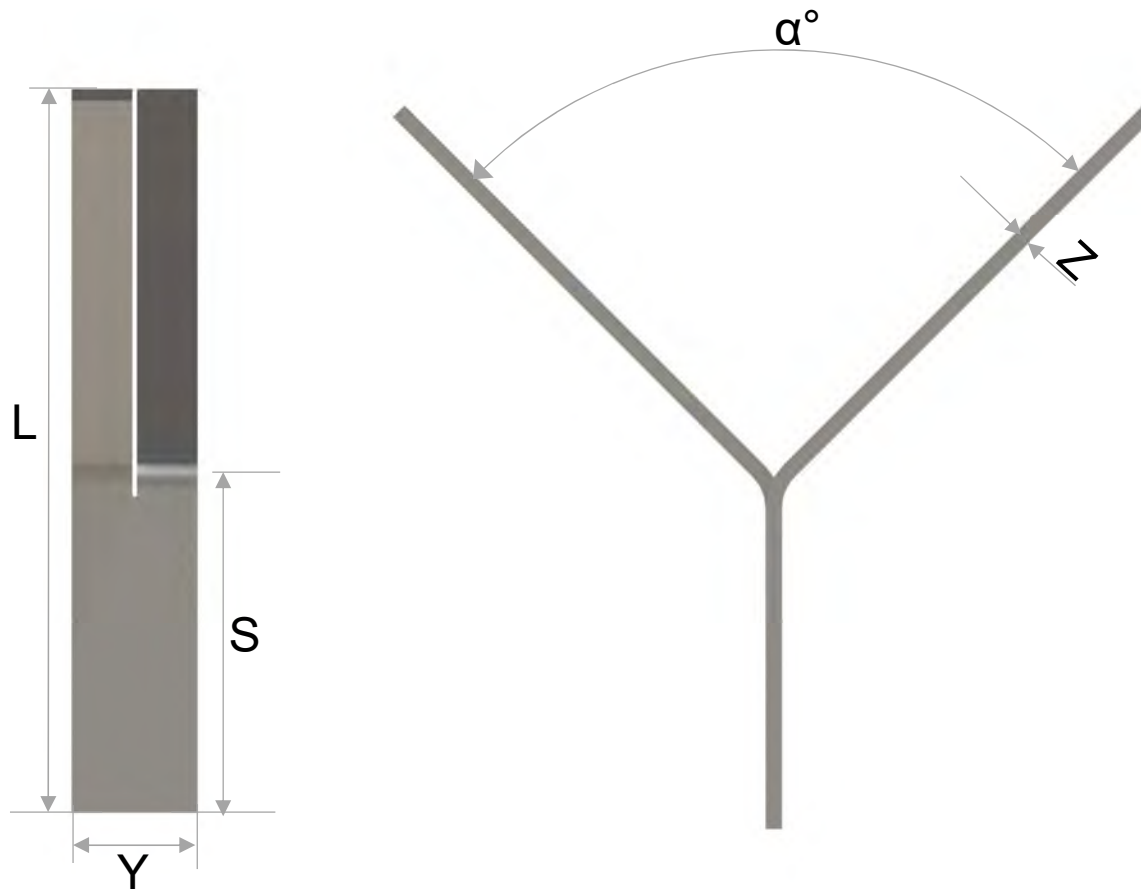

OPTIONS :
SEE NEXT PAGE



YHA .30/3(90°)-130(070) - 310					
TYPE	SECTION	OPENING	LENGTH	LENGTH	ALLOY
	YxZ	α°	L	S	

Our recommendations:

- This anchor is designed for electrode welding

www.anchorsforrefractory.com
contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

YHA-30/4 (90°)-130(050)- 45°-310
 TYPE SECTION OPENING LENGTH LENGTH CUT ALLOY
 YxZ α° L S B°



Anchors designed for electrode welding

YHA-30/4 (90°)-130(050)- 25-310
 TYPE SECTION OPENING LENGTH LENGTH LENGTH ALLOY
 YxZ α° L S R



YHA-30/4 (90°)-130(050)- 25(10) - 310
 TYPE SECTION OPENING LENGTH LENGTH LENGTH HOLE ALLOY
 YxZ α° L S R D




Anchors to be screwed

www.anchorsforrefractory.com
contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

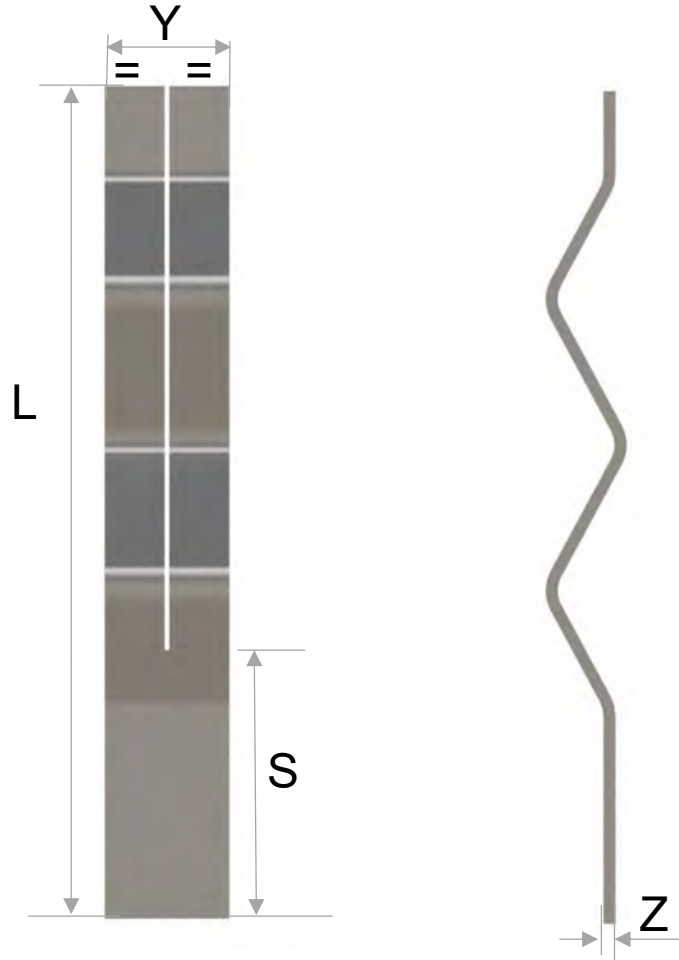

YHB- 30/3-130(040) - 304				
TYPE	SECTION	LENGTH	LENGTH	ALLOY
	YxZ	L	S	

Our recommendations:


- This anchor is designed for electrode welding
- This anchor will be open on site by the installer



www.anchorsforrefractory.com
 contact@anchorsforrefractory.com

Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

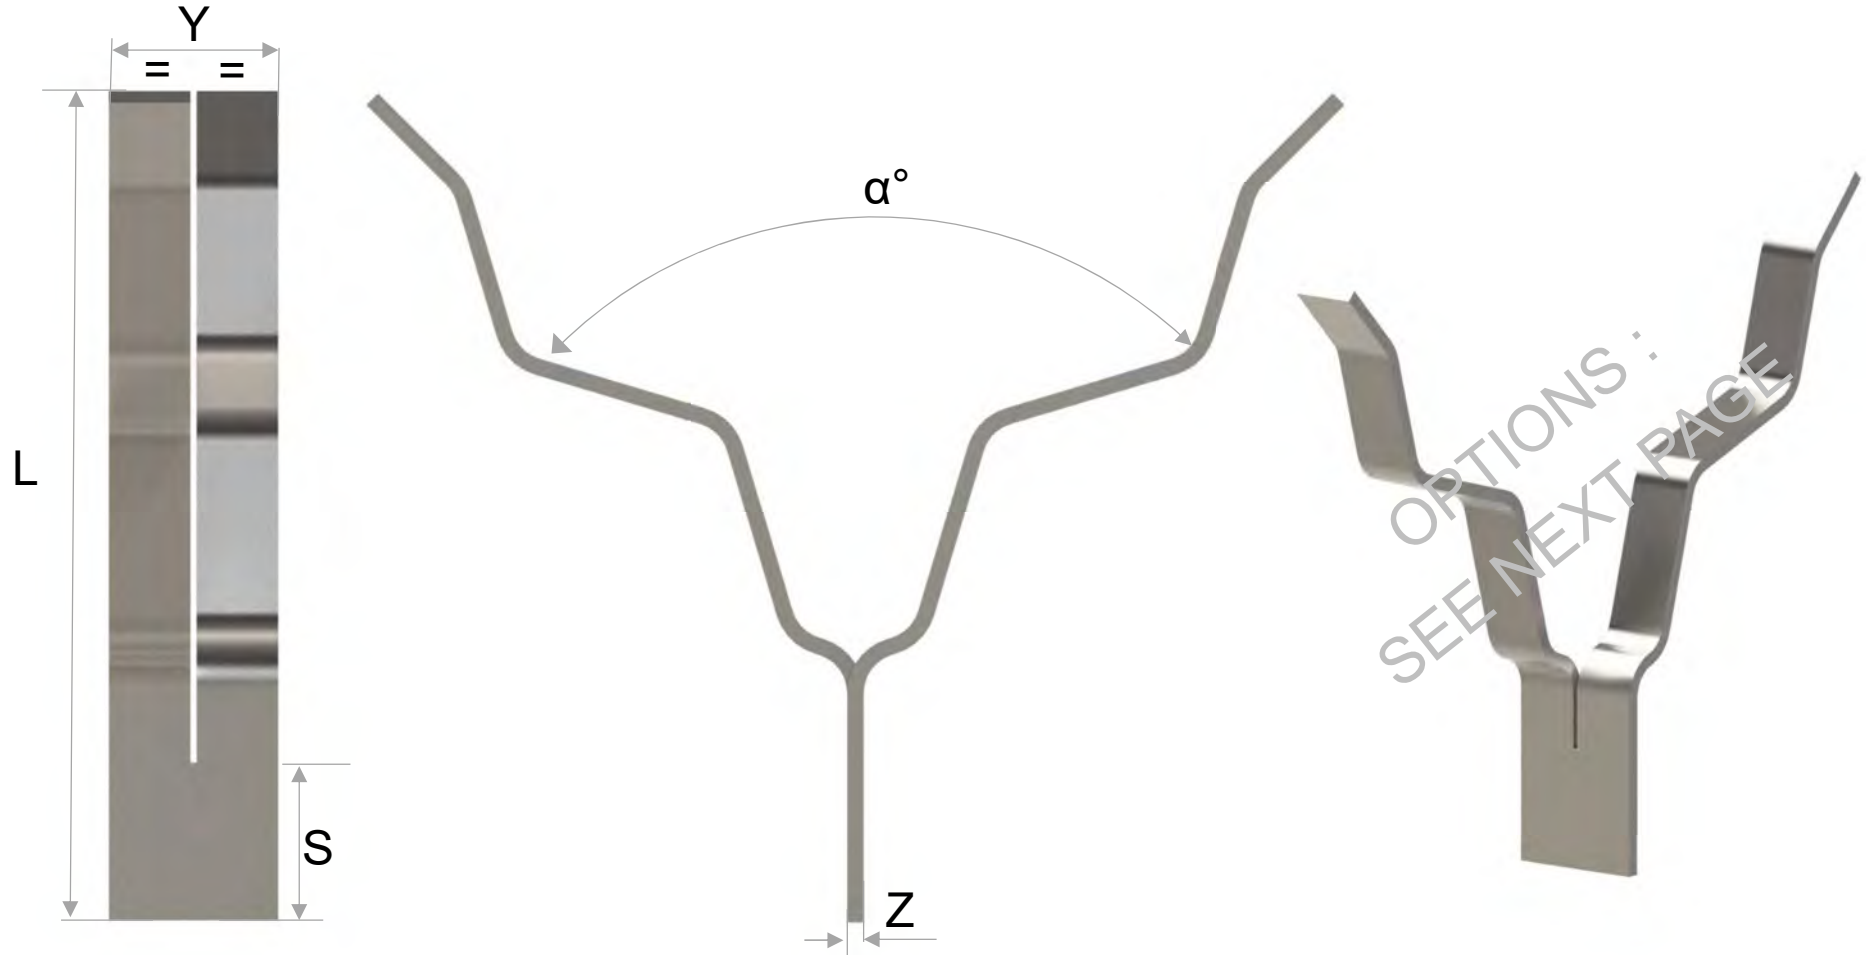

YHB- 30/3(90°)-130(040) - 310					
TYPE	SECTION	OPENING	LENGTH	LENGTH	ALLOY
	YxZ	α°	L	S	

Our recommendations:

- This anchor is designed for electrode welding
- This anchor will be open on site by the installer



www.anchorsforrefractory.com
 contact@anchorsforrefractory.com

Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentionned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.

YHB-30/4 (90°)-130(040)- 45°-310

TYPE	SECTION	OPENING	LENGTH	LENGTH	CUT	ALLOY
Yxz		α°	L	S	B°	



YHB-30/4 (90°)-130(080)- 25-310

TYPE	SECTION	OPENING	LENGTH	LENGTH	LENGTH	ALLOY
Yxz		α°	L	S	R	



YHB-30/4 (90°)-130(080)- 25(10) - 310

TYPE	SECTION	OPENING	LENGTH	LENGTH	LENGTH	HOLE	ALLOY
Yxz		α°	L	S	R	D	



Anchors designed for electrode welding

Anchors to be screwed

www.anchorsforrefractory.com
contact@anchorsforrefractory.com



Tél : + 33 3 66 50 00 33 / +33 7 85 06 29 49
 PA Vallée de l'Escaut - rue de la crête - 59264 ONNAING-France

These informations are general informative indications. Many particular conditions of use and exceptions exist in industrial applications, many parameters can influence the technical choices. The informations mentioned in this technical data sheet, in particular regarding the features and the performances of the products, is provided for guidance purposes only and is liable to change depending of the conditions of use and environment. Information mentioned can be modified without notice. The company ANCHORS will in no circumstances be held liable for the consequences of any improper use. If you want some suggestions from us, applicable for your specific application and/or environment, please contact us.